




*Professional  
power-feeding  
unit with variable  
speeds*

## STEFF SUPERSONIC 3

Safety device for a safe and effective workpiece feeding on different types of traditional wood-working machines

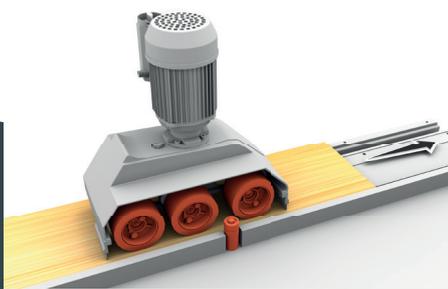

### HIGH-QUALITY END PRODUCTS

3-wheel model : the ideal solution for the feeding of laths and medium or small-size workpieces. Thanks to the two infeed-wheels and the third outfeed one, the workpiece is constantly and evenly fed through the working process, thus remarkably improving the quality of the end products.



### TOP OF THE RANGE, ELECTRONIC

A wide range of variable speeds ( 0,5 to 33 m/min) with electronic selection and read-out display. The ideal solution for those, who often need to change the feeding rate. By pushing a button on the motor you can easily change the feeding direction back and forth



### PERFECT GRIP

50-Shore wheels made of patented "Feeder Grip" rubber, providing the longest durability and the highest grip on the workpiece

- **Improves the safety** : the operator does not have to put his hands close to the tool
- **Improves the finish quality**, thanks to the constant and even feed-rate
- **Feed-rate can be easily selected** to meet every specific working need
- **Easily adjustable** to suit different sizes of work piece



## STEFF SUPERSONIC 3 SERVICE

Worldwide after-sale service.  
Real-time, on-line remote assistance through a dedicated augmented reality APP.  
Spare-parts availability for up to 10 years, shipment within 24 hrs


## DATA SHEET

Variable speeds	from 0,5 to 25 mt/min (up to 33 m/min optional)
N. of wheels	3
Wheel diameter and thickness	120 x 60 mm
Motor	1 HP / 0,7 KW RPM 1400 /2800
Wheel suspension	20 mm
Distance between wheels	 133mm - 153 mm
Distance between first and last wheel	 286 mm
Overall dimensions and net weight of the feeding unit	474 x 220 x 490 mm 36 Kg
Overall dimensions and net weight of the stand	540 x 910 mm 35 Kg
Package dimensions and gross weight (feeding unit)	670 x 570 x 330 mm 38 Kg
Package dimensions and gross weight ( stand)	800 x 330 x 330 mm 37 Kg



### SAFETY AS A CORE VALUE

A power-feeder improves the safety as it feeds the workpiece close to the tool, while operator's hands are kept at a distance. Its effectiveness depends on specific design and manufacturing criteria. Maggi feeders are the only ones designed and manufactured in Italy and abiding by all EU safety norms.

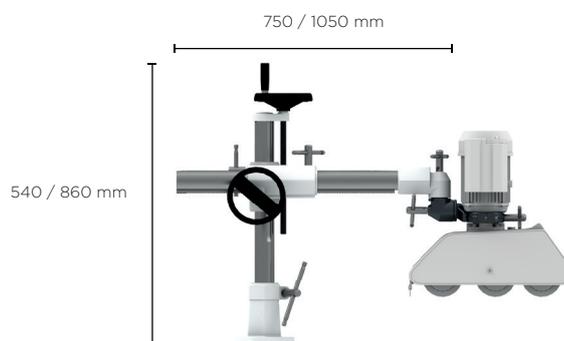

### UNIVERSAL STAND

For easy positioning and adjusting of the feeding unit on the machine tool. It is easy to fix, stable and strong : foot, cross-shaped piece, pipe, joint and collar are made of cast-iron and the two columns are made of rectified steel of considerable thickness.

**MAGGI TECHNOLOGY**  
Via delle Regioni, 299  
50052 Certaldo (Firenze) Italia

**SERVICE**  
+39 0571 635 433  
service@maggi-technology.com

**SALES**  
+39 0571 635 474  
sales@maggi-technology.com

